

Installation & User Guide

Dual-Flush Toilet

OVE



PANACHE



OPIAZ



PARLIAMENT



PERSUADE



ESCALE



KOHLER®

Tools and Materials




10" Adjustable Wrench



Supply Shut-Off Valve



Tape Measure




Level



Sponge



Pipe Wrench



Tubing Cutter



Safety Glasses



Drill and assorted bits

Plus:

- Connector
- Metal File
- 1/2" Nut Driver/Socket
- Hacksaw
- Screwdriver

Thank You For Choosing Kohler Company

We appreciate your commitment to Kohler quality. Please take a few minutes to review this manual before you start installation. If you encounter any installation or performance problems, please don't hesitate to contact us. Our phone numbers are listed on the back cover. Thanks again for choosing Kohler Company.

Before You Begin




CAUTION: Risk of personal injury or product damage. Handle with care. Vitreous china can break or chip if the product is handled carelessly.

- Observe all local plumbing and building codes.
- Carefully inspect the new toilet for damage.
- If the existing toilet does not have a supply shut-off valve below the cistern, install one before installing the new toilet.
- Install sufficient backing behind the finished wall to provide a secure material for the anchoring devices.


Installation

- 1** Remove the existing toilet: Turn off the water supply and flush the toilet, then sponge out all remaining water from the cistern. Disconnect the supply shut-off valve (if present), and remove the old pan and cistern.
CAUTION: Risk of hazardous gases. If the new toilet is not installed immediately, temporarily stuff a rag in the closet flange.

- 2** Define the position of connector: Place the connector onto the pan, position between outlet and waste pipe.

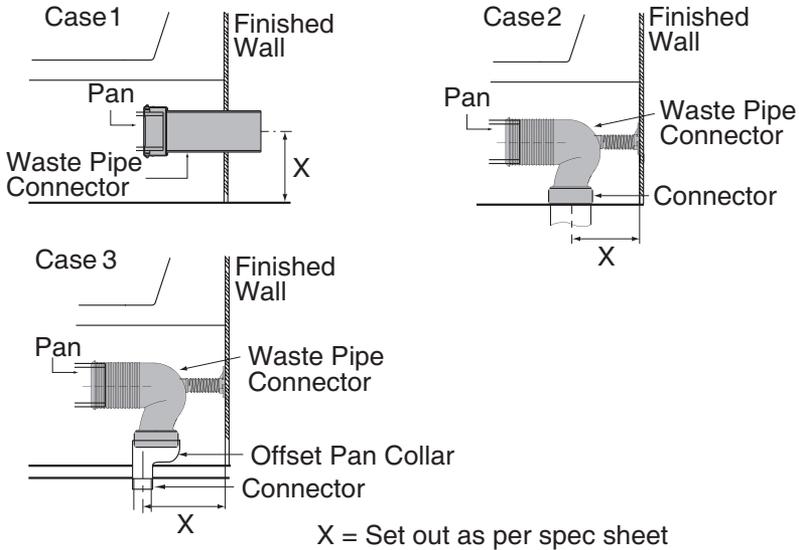


- 3** Position the template on the floor. Mark the positions of the floor fixing kit holes.

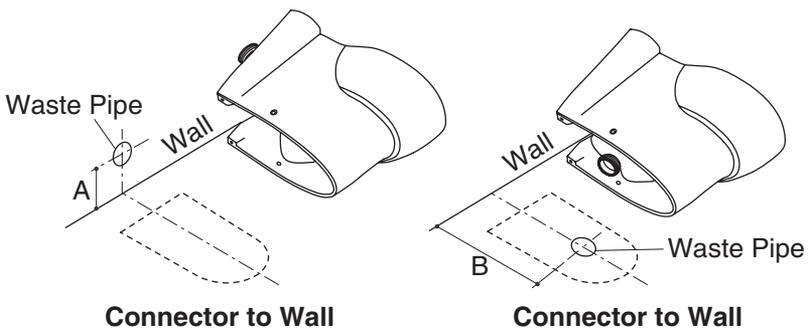

Floor fixing option


4 Bracket

Drill $3/8''$ (10 mm) fixing holes at the marked locations on the floor and insert the anchor. Install the washer and insert the hexagon screw into the bracket then tighten the screw. Position the toilet in the installed position. Install the sleeves, tighten the screw and attach the caps.

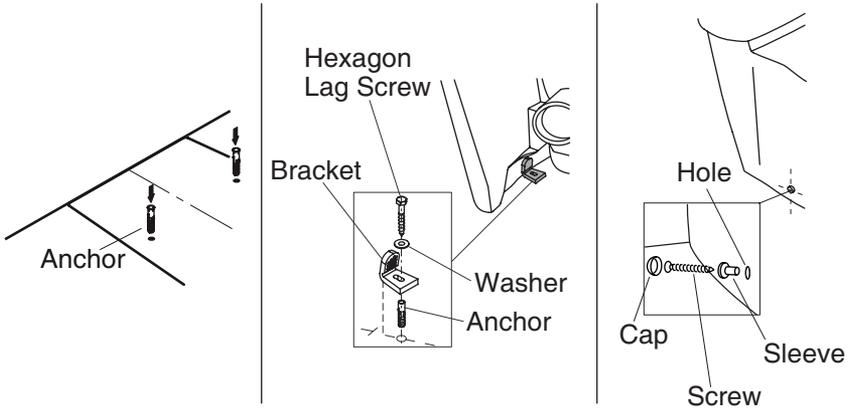


5 Screw

Drill $5/16''$ (8 mm) mounting holes at the marked locations. Insert anchors into the holes. Place the toilet and align with anchoring holes position. Tighten screws and attach the bolt caps.

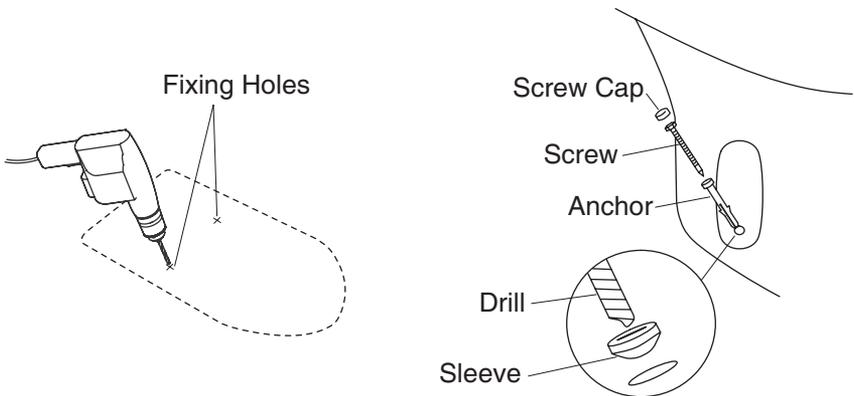


Installation


6 *In cistern.*



OVE




PANACHE



**OPIAZ
PARLIAMENT
PERSUADE
ESCALE**

Tank Hose Stop Valve




**Optional Bottom Water Inlet Kit
148794A-NA for use on
OPIAZ
PARLIAMENT
PERSUADE
ESCALE**


Tank fixing option

- 7** Position the cistern on the pan by centering the gasket on the pan inlet. Assemble the retaining washing and sealing washer to the screw. Securely tighten the screw so the cistern is level.

* Optional for different product

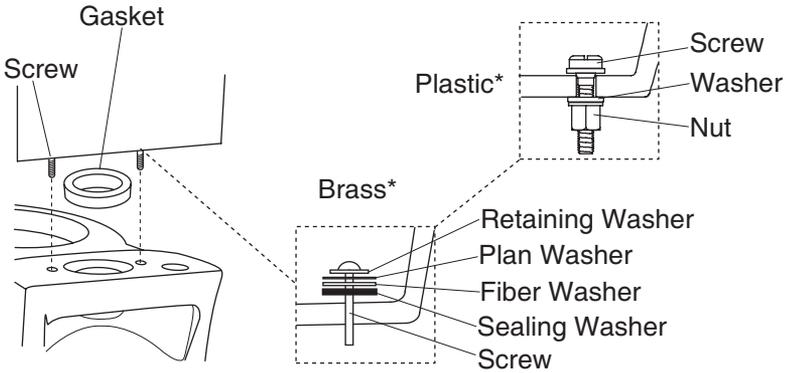


- 8** Connect the supply shut-off valve to the supply hose and connect supply hose to toilet supply shank.

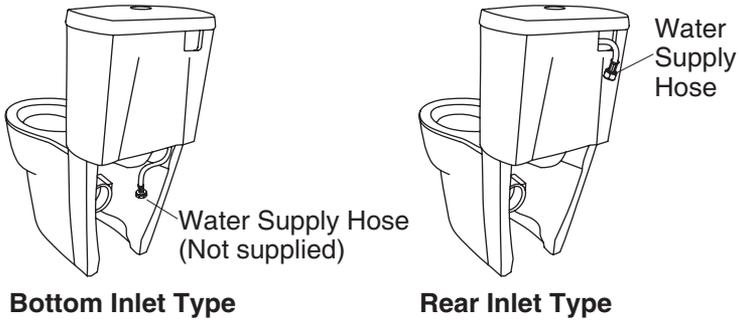


Install the Push Buttons


1 *Disassemble the push rods.*

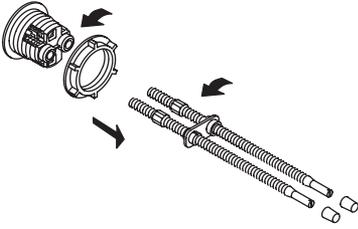


2 *Using the push rod, measure the distance between the flush valve and the top of the tank lid. Mark this length and cut the push rod to length. Cut the push rod to length.*

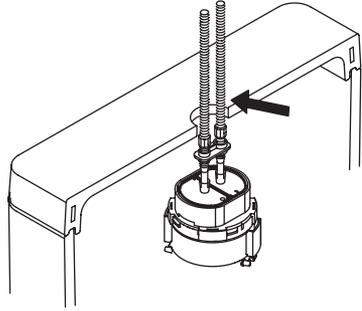

3 *Reassemble the push rods.*

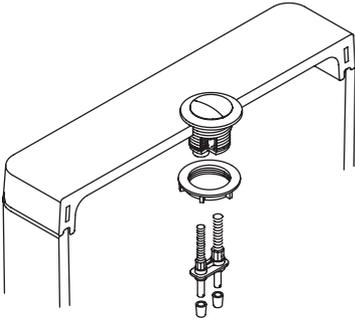


4 *Fit the lid and test the buttons. Adjust the rods as required.*

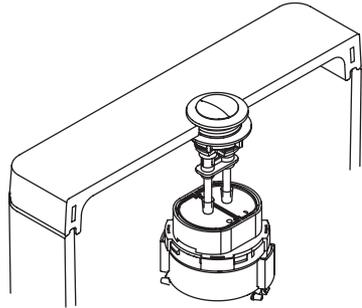


Install Flush Valve

Flush Valve A

1 Release flush valve by turning right and pull straight up on the canister.

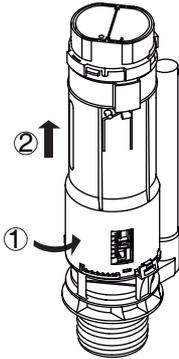


2 Assembly flush valve by pushing straight down into the canister and turning left.

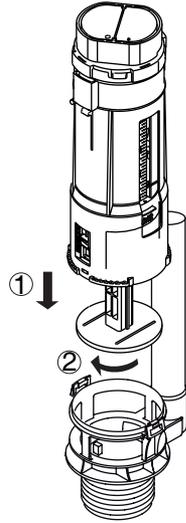


Flush Valve B

1 Release flush valve by squeezing the tabs on both side of the canister and pulling straight up out of the flush valve.



2 Assembly flush valve by pressing it into the flush valve so it snaps into place.

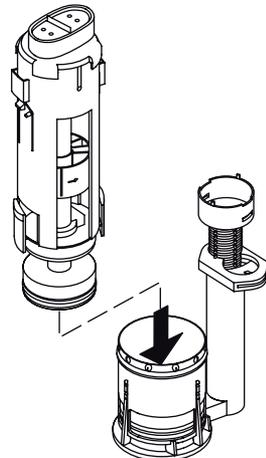

CONTACT AND WARRANTY INFORMATION

For warranty information, please visit our website

Australia

www.au.kohler.com.

New Zealand

www.kohler.co.nz

KOHLER®

CALL US FOR HELP

NEW ZEALAND
KOHLER NZ LTD

Free Ph: 0800 564 537 (0800 KOHLER)
Free Fax: 0800 664 488
www.kohler.co.nz

AUSTRALIA
KOHLER CO.

Free Ph: 1300 658 277
Free Fax: 02 9618 1189
www.au.kohler.com